

Complete kit, in-duct pump, for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LCF300



PREMIUM

**NEW VERSION**


**Standard size**



## SPECIFICATIONS

Flowrate max	15 l/h
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level	
Protection rating	IP64
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable	1.6 m
Trunking dimensions	80 x 60 mm
Certifications	CE, UKCA, EAC

\* The pump is able to run 100% of the time if necessary.

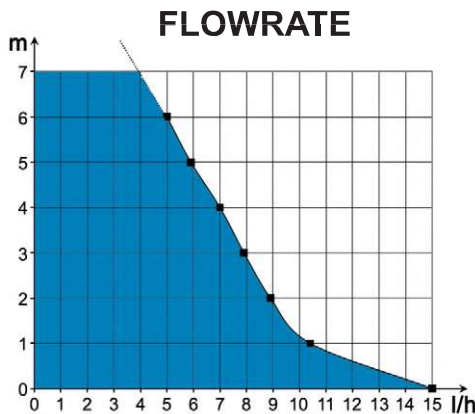

## Recommended accessory


### Connection extension kit

Allows the pump to be moved into a false ceiling, thus reducing the noise level.

Ref: GC1KCTC710



Hose diameter  
Suction : 5/7 mm - supplied  
Discharge : 6/9 mm - not supplied

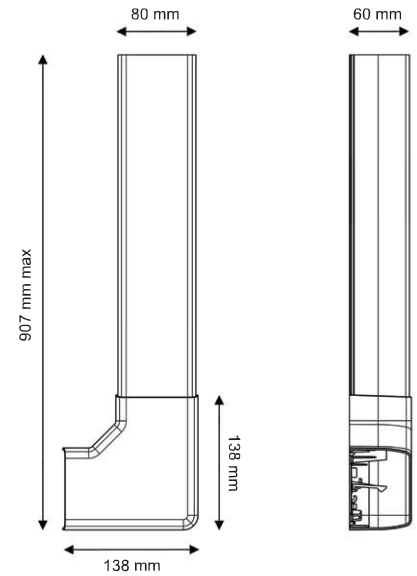

## BENEFITS



### mini FLOWATCH® 2 included

It assures a high reliability and an easy maintenance.



### Very silent

Very silent pump (20.2 dBA), suitable for an installation in any room.



### Stop Vibrations included

Eliminates vibrations transmitted to the discharge pipe, thus reducing the noise level of the system!



### Custom-made pump case

For easy installation, reduced noise level and perfect integration into the trunking.



### Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.



### New trunking (standard size)

A market-standard trunking, attractive, easy to install, and with many available accessories.



### Kit pre-assembled

Pump is already installed in its duct. Installation is easy and quick.

## CONTENTS



Duct with elbow- Finishing gasket - Finishing ceiling plate - Pump in absorber bracket - Stop Vibrations - Stop Siphoning - Reservoir with air-vent tube - Power / alarm cable - Reservoir stand - Inlet tube - Suction tube 0.25m - Screws and rawlplugs